


SERIE 150.95

HP 35/95 - KW 26/70

10/35 cm - 4/14 in 

3p. Cat I-II



OPTIONAL

1808

Mod.	cm	↔	in	HP min / max	KW min / max	N. T	kg	Lb
N 1004	100		39	35/95	26/70	4	500	1102
N 1154	115		45	35/95	26/70	4	510	1125
N 1356	135		53	40/95	29/70	6	630	1389
N 1506	150		59	40/95	29/70	6	650	1433
N 1656	165		65	40/95	29/70	6	670	1477
N 1808	180		71	48/95	35/70	8	800	1764
N 2008	200		79	50/95	36/70	8	820	1808
N 2210	220		87	58/95	42/70	10	970	2138
N 2510	245		96	60/95	44/70	10	990	2183

STANDARD

PdF. 540 = 167 RpM

PdF. 750 = 232 RpM

OPTIONAL

PdF 540 =

I 145

II 167

III 206 RpM



1656

20 cm 8 in


OPTIONAL

0

20 cm 8 in

+100 Kg 220 Lb

2210

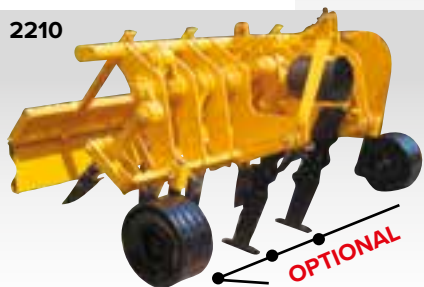

OPTIONAL