

# SERIE 180.250

HP 70/250 - KW 51/181

15/42 cm - 6/17 in






3p. Cat II



OPTIONAL

4016

Mod.	cm	↔	in	HP min / max	KW min / max	N. T	kg	Lb
S 2008	200		79	70/250	51/181	8	1800	3960
S 2208	220		87	70/250	51/181	8	1850	4070
S 2508	245		96	75/250	55/181	8	1950	4290
S 2510	245		96	75/250	55/181	10	2100	4620
S 2710	270		106	80/250	58/181	10	2160	4752
S 3010	300		118	90/250	66/181	10	2250	4950
S 3012	300		118	90/250	66/181	12	2400	5280
S 3512	350		138	120/250	88/181	12	2550	5610
S 3514	350		138	120/250	88/181	14	2700	5940
S 4016	400		157	130/250	95/181	16	3210	7062
S 4516	450		177	140/250	102/181	16	3370	7414

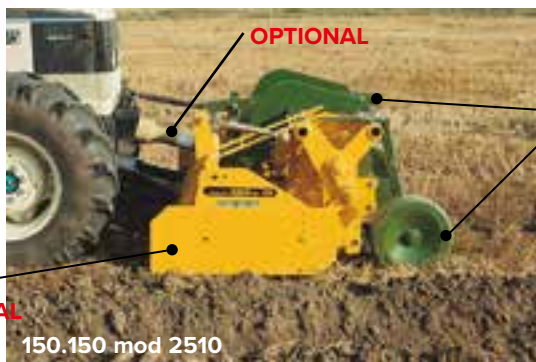

OPTIONAL

OPTIONAL

OPTIONAL

150.150 mod 2510

X p. 11/15